



# SPECIALTY TOP CO.

## INSTALLATION INSTRUCTIONS JEEP® WRANGLER ROLL BAR TOP 1986-1995 PART #118/119-050

Thank you for purchasing Specialty's Roll Bar Top for your Jeep® vehicle. It has been designed for great fit and long wear. Please read and follow, precisely, all installation instructions provided when installing top. Failure to do so may result in a poor fitting top and could place occupants in a potentially hazardous situation.

### TOOLS REQUIRED:

1/8" DRILL BIT                      ELECTRIC DRILL  
#2 PHILLIPS SCREWDRIVER

### INSTALLATION TIPS

Before you begin installing this top, here are a few tips to make installation easier.

This top should be installed where the temperature is above 72 degrees Fahrenheit. Below this temperature, the top may contract making it difficult to install.

It is normal for a top to contract and wrinkle when stored in the shipping carton. The top will relax and wrinkles will disappear within a few days of installation as fabric adjusts to shape of mounting hardware.

**Step 1.** You will need a windshield channel installed on top of your windshield frame in order for this roll bar top to work properly. **If you have this channel already installed, please disregard this step. If you do not have it installed you will need to purchase Specialty part number 119-9340 and install it as shown. See figure 1** Place windshield channel (Item 1) on top of windshield frame, centered from side to side, and with front edge of channel flush with front of windshield frame. Mark and drill 1/8" holes in top of windshield frame using windshield channel as a template. Secure to windshield frame with #10 x 1/2" sheet metal screws (Item 2).

**Step 2.** Place sewn in plastic into slot in windshield channel and pull top over roll bar. **See figure 2.** Wrap buckle straps around seat belt harnesses behind the front and seats. Thread through buckle and tighten. Wrap hook and loop straps around horizontal bars on roll bar, pulling tight as you go.


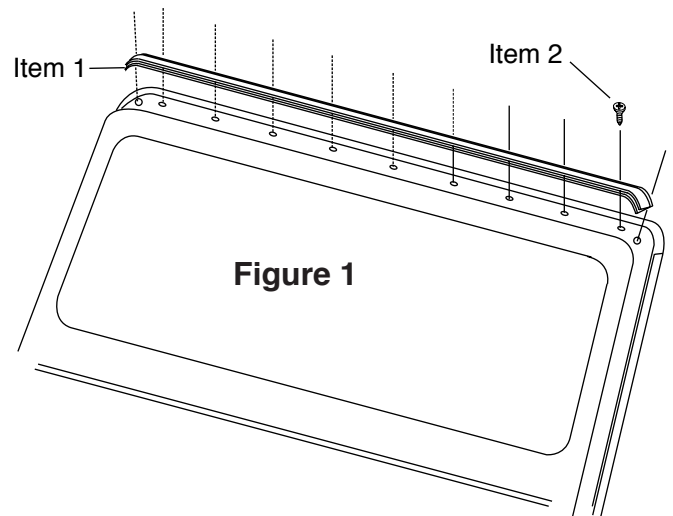


Figure 2

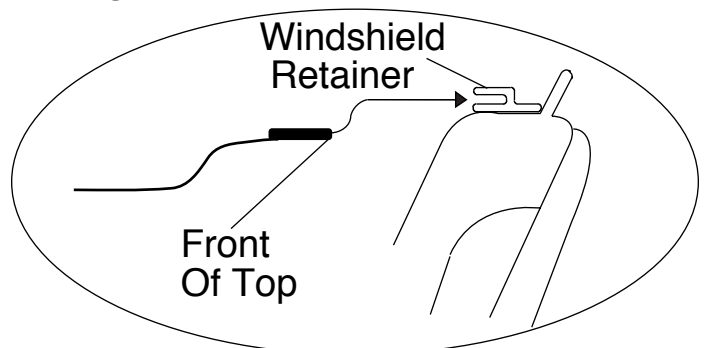

## CARE INSTRUCTIONS

Convertible tops require special care if you want to get the maximum usage and enjoyment from them. The following recommendations, if followed carefully, can extend the life of your top.

1. Hand wash using a mild non-detergent soap such as Ivory. Use a nonabrasive cloth or sponge. Rinse thoroughly.
2. **DO NOT wash in direct sunlight and avoid automatic car washes.**
3. When your top is clean, we recommend using "RAGGTOPP or "303 Protectant" on the vinyl top. This product contains a sunscreen that helps protect from the sun's damaging rays. RAGGTOP is available from your dealer or from Wolfsteins Pro Series (800) 377-4700 or [www.wolfsteins.com](http://www.wolfsteins.com).

## WARRANTY INFORMATION

Specialty manufacturing warrants to the original purchaser of any product it manufactures, that the product will be free of defects in material or workmanship for a period of 90 days from date of purchase. Such obligations under this warranty shall be limited to the repair or replacement, at Specialty's discretion, of any assembly or parts which upon examination by Specialty Top CO prove to be defective. All defective items must be returned with proof of purchase to Specialty Top CO, 200 East 64th Avenue, Denver, Colorado 80221, freight prepaid. This warranty does not cover damage resulting from abuse, misuse, alteration, accident or damage in transit. Specialty's obligations under this warranty are limited to the aforementioned repair or replacement of warranty defects for which the return authorization has been received during the warranty period, and **SPECIALTY TOP CO SHALL NOT BE LIABLE FOR ANY INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING FROM BREACH OF THIS OR ANY IMPLIED WARRANTY.**